

MicroMax Series

AIR COOLED CONDENSERS

For cooling your closed loop processes
Water or Water / Glycol



APPLICATIONS:

- Spot Welders
- Small Lasers
- Spindles
- Induction Heaters
- Many other industrial processes & equipment

FEATURES INCLUDE:


- ▶ Non-ferrous wetted components
- ▶ High-pressure recirculating pump
- ▶ Standard digital temperature controller
- ▶ Lift out doors for easy servicability
- ▶ Corrosion-free reservoir
- ▶ Casters
- ▶ 460/3/60 available on 1 and 1.5 Ton

OPTIONS:

- ▶ Hot gas bypass
- ▶ Pressure relief bypass
- ▶ Stainless steel cabinet

MicroMax Series

MicroMax Series

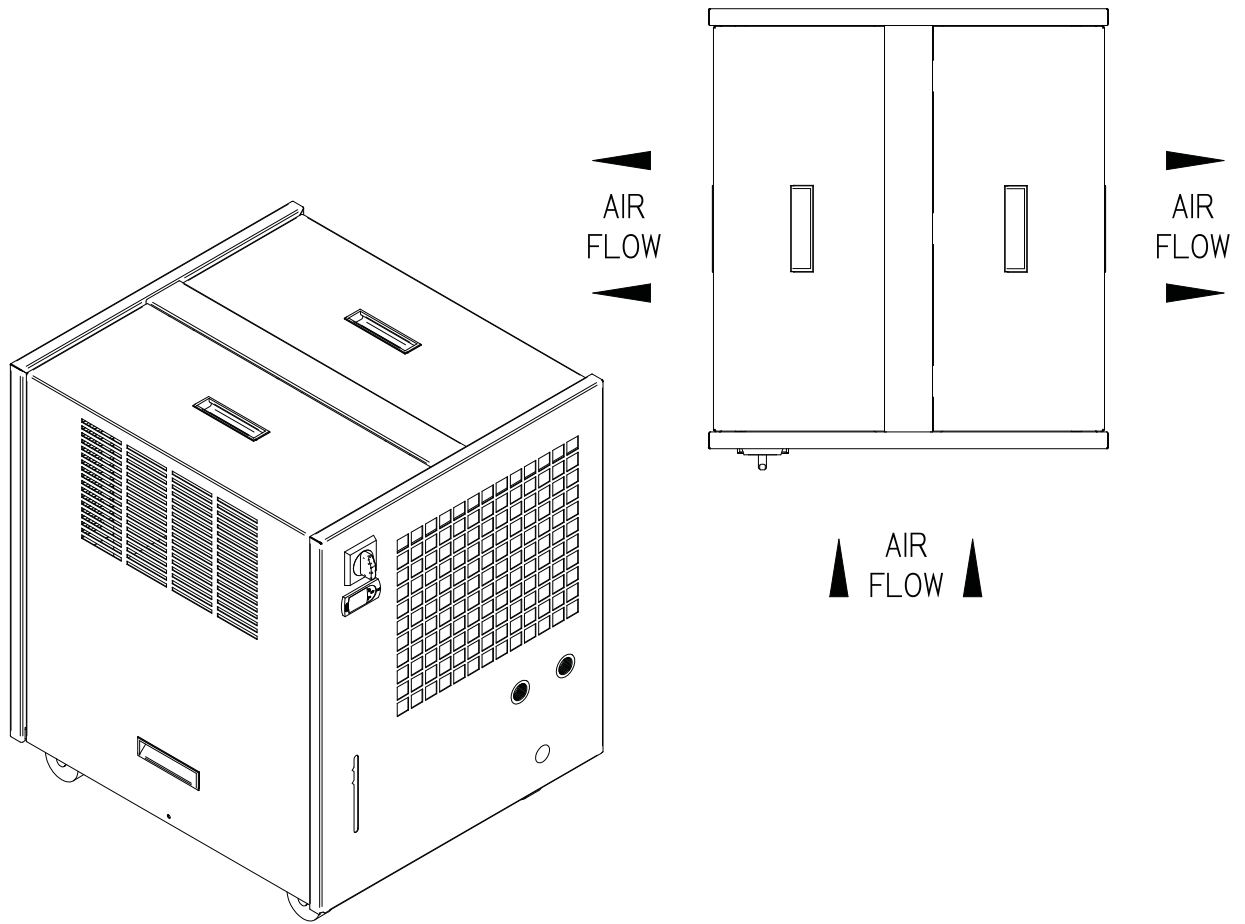

Model MM	Electrical	Capacity BTU's/HR	Dimensions (in)			Pipe Diameter	Pump			FLA	Reservoir	Dry Weight
			Length	Width	Height		HP	GPM	PSI			
MM180	115/1/60	1500	22	19	25	0.5	0.33	2	50	13	5	160
MM250	115/1/60	3000	22	21	32	0.5	0.33	2	50	16	5	180
MM500	115/1/60	5040	22	21	32	0.5	0.33	4	50	20	5	210
MM500	230/1/60	5040	22	21	32	0.5	0.33	4	50	10	5	210
MM750	230/1/60	7230	29	26	32	0.5	0.33	4	50	14	10	235
MM1000	230/1/60	12000	29	26	32	0.5	0.33	4	50	14	10	260
MM1500	230/1/60	18000	29	26	32	1	0.33	4	50	17	10	500
MM1000	460/3/60	12000	29	26	32	1	1	10	35	5	10	450
MM1500	460/3/60	18000	29	26	32	1	1	10	35	7.5	10	550

Chiller specifications are based on a 65 deg F leaving fluid temperature at a 95 deg ambient

ALPHATRON
INDUSTRIES, INC.

3411 SW 49th Way, Suite #3, Davie, FL 33314 USA

Phone 800-331-2805

www.AlphatronIndustries.com